

## SPECIFICATIONS

### Mechanical & Environmental


Parameter	Performance
<b>Operating Temperature:</b>	0°C to +55°C Standard
	-40°C to +65°C Optional
<b>Storage Temp.:</b>	-40°C to +85°C
<b>Cooling:</b>	Internal ball bearing DC fan
<b>Weight:</b>	22 lbs max.

**Parallel configuration:** Connect as shown in the manual.  
**Inhibit:** to inhibit P.S., remove the jumper between INH and GND in TB1 on front panel  
**Variable voltage configuration:** Consult factory or download the information from the website at [www.theallpower.com](http://www.theallpower.com).

## MODEL SELECTION

Model	Nominal Voltage (VDC)	Maximum Current (ADC)
<b>T2KOS-03</b>	3.3V	270A
<b>T2KOS-05</b>	5V	270A
<b>T2KOS-15</b>	15/12V	145A
<b>T2KOS-28</b>	28/24V	80A
<b>T2KOS-48</b>	48V	42A
<b>T2KOS-250</b>	250V	9A

## MECHANICAL OUTLINE

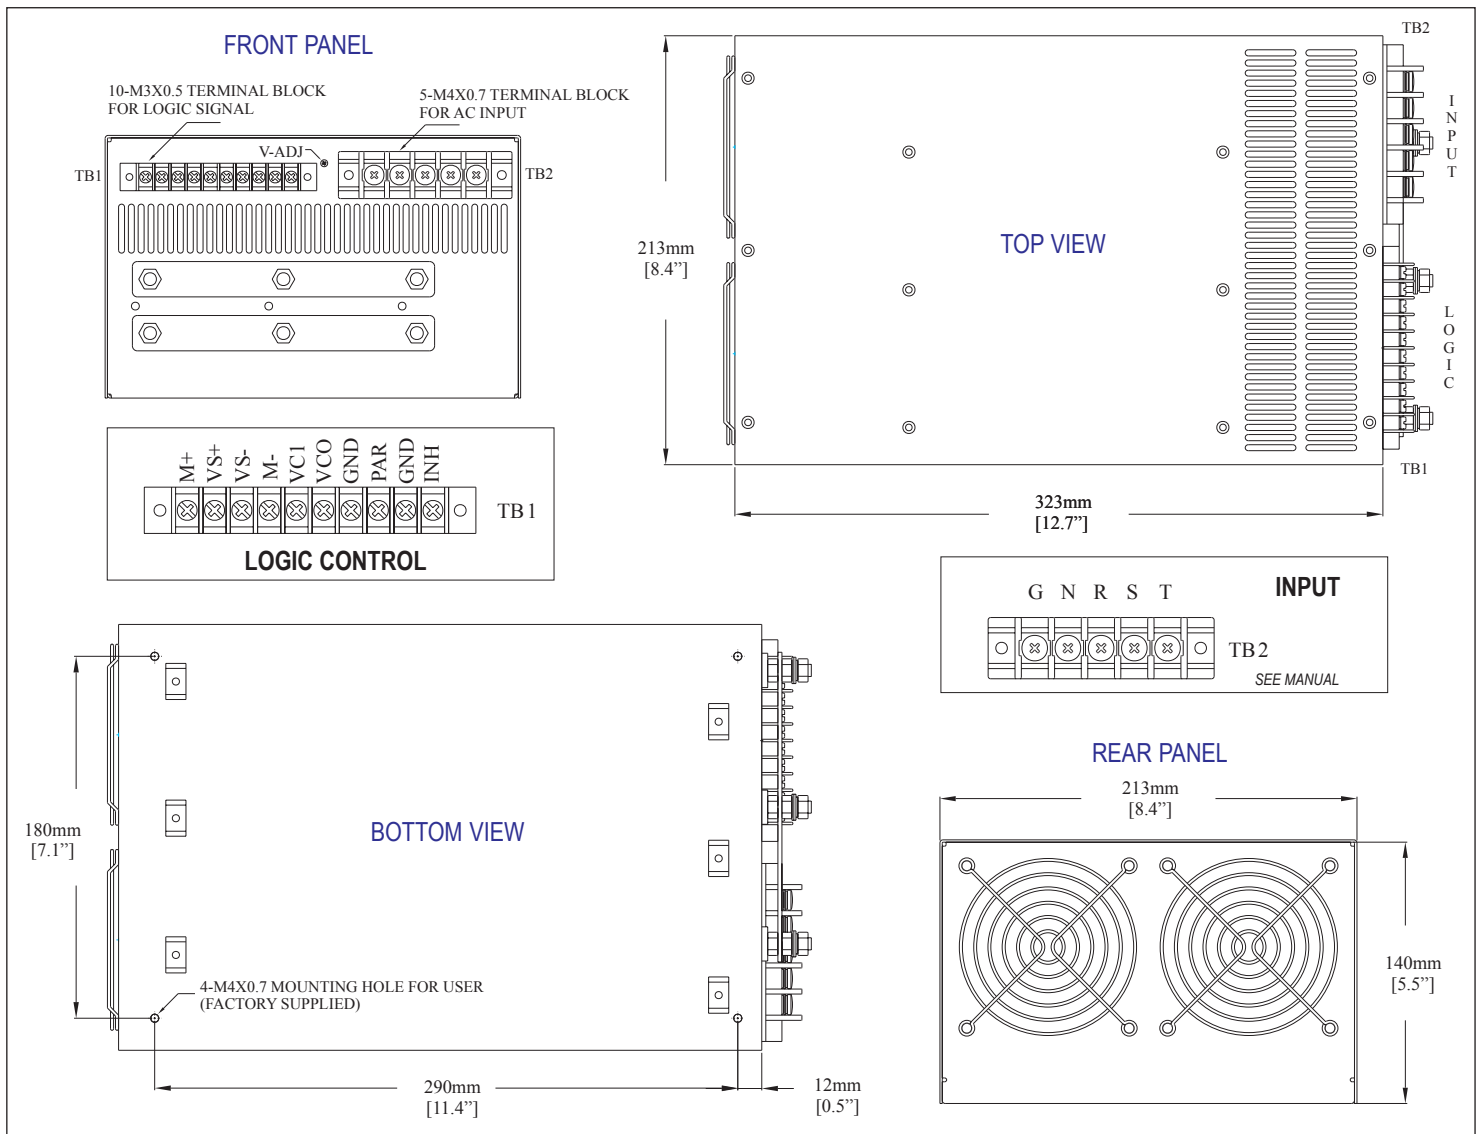

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

100 SCHOOL STREET, BERGENFIELD, N.J. 07621, USA  
 TEL (201) 385-0500 FAX (201) 385-0702  
 WEBSITE: [www.theallpower.com](http://www.theallpower.com) E-MAIL: [tdisales@theallpower.com](mailto:tdisales@theallpower.com)

