


## MODEL SELECTION

AC INPUT MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT
TRU-28-175-AI	28VDC	175 AMPS
TRU-48-100-AI	48VDC	100 AMPS
TRU-120-40-AI	120VDC	40 AMPS
TRU-270-18-AI	270VDC	19 AMPS
AC/DC INPUT MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT
TRU-28-175-DI	28VDC	175 AMPS
TRU-48-100-DI	48VDC	100 AMPS
TRU-120-40-DI	120VDC	40 AMPS
TRU-270-18-DI	270VDC	18 AMPS

OPTION DESIGNATION	
- ORD	ORING DIODE REDUNDANT / PARALLEL OPERATION
- MIL	RUGGEDIZED FOR SHOCK AND VIBRATION
- LVBD	LOW VOLTAGE BATTERY DISCONNECT
- 400 Hz	400 Hz INPUT
- REF	REPLACEABLE EXTERNAL FANS

## MECHANICAL OUTLINE

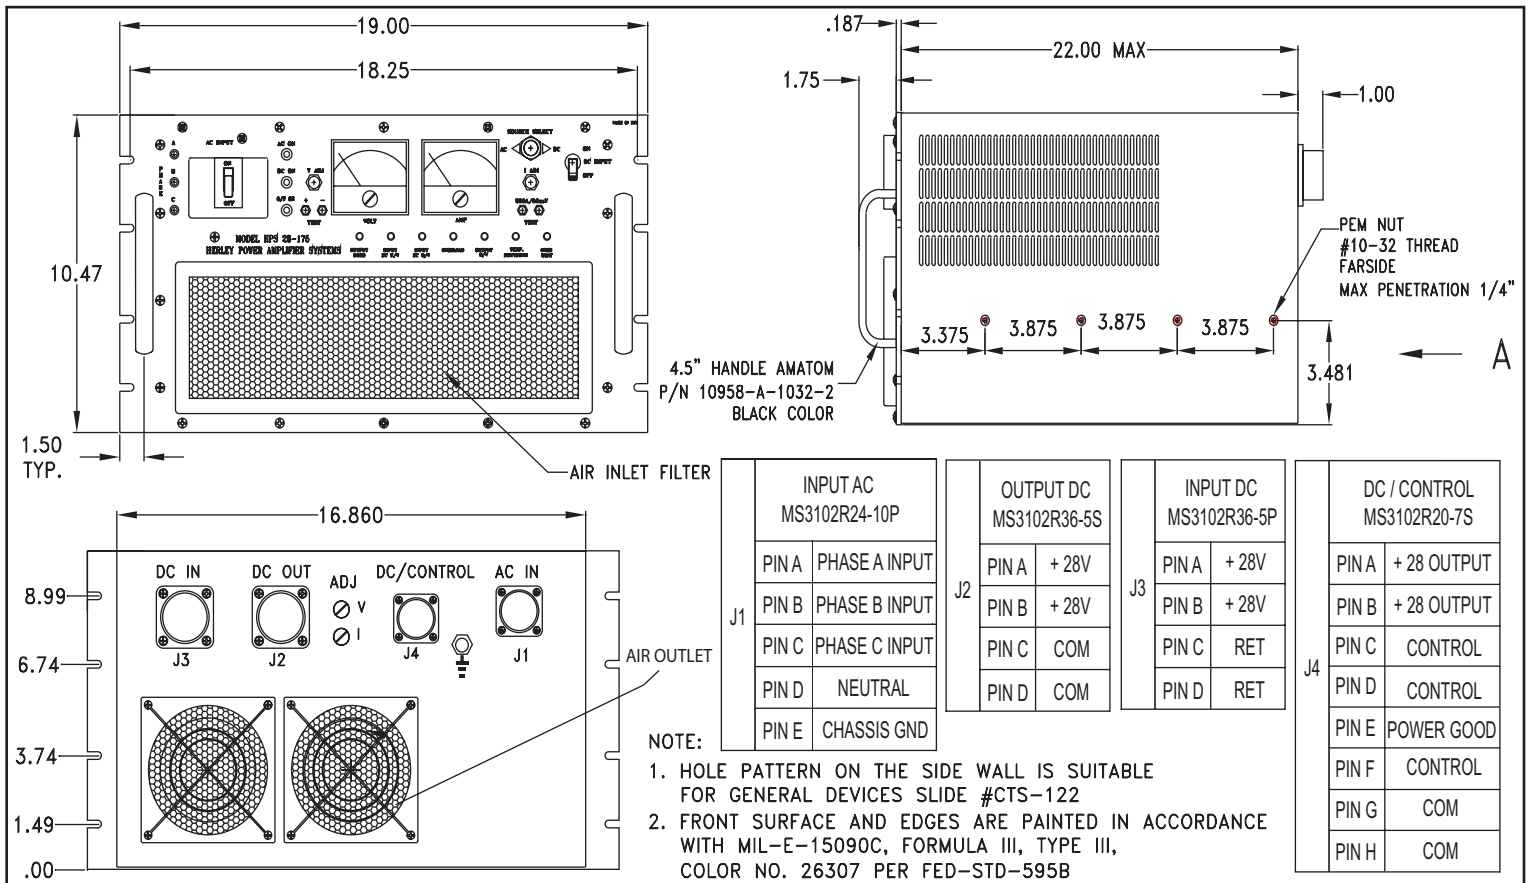

WEB : [www.technologydynamicsinc.com](http://www.technologydynamicsinc.com)

E-Mail : [tdisales@theallpower.com](mailto:tdisales@theallpower.com)

PHONE : (201) 385-0500 FAX : (201) 385-0702



**TECHNOLOGY DYNAMICS INC.**

100 School Street  
 Bergenfield, NJ 07621



ISO 9001  
 A5269